


ACL-20 Elevator Control Panel

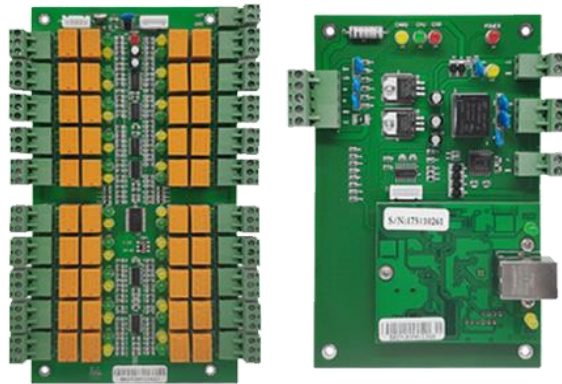

Feature Highlight:

- Support 20 floors by default (expandable to 40 Floors max.)
- Support time zone control bypass for individual floor
- Support to reader.
- Support both RFID & biometrics readers
- Emergency bypass function by software
- Emergency bypass function by key Switch
- Support 20,000 Users And 100,000 Event Memory

| Specifications | ACL-20 |
|---------------------------|--|
| MCU | 32bits @ 60MHz 256K Flash Memory 32K SRAM (Buffer) |
| Memory | 64Mbits Non-Volatile SPI Flash Memory (Storage) |
| Operating Temperature | 0 °C to 40 °C |
| Card holder | 20.000 |
| Event Transaction | 100.000 |
| Number Reader Supported | 1 |
| Number of IO Supported | 20 |
| Number of Floor Supported | 20 |
| On-board Real Time Clock | Yes |
| Power supply | 12V DC,5A |
| On-board LED Control | Power / Communication / LAN / Event / Error |
| On-board Buzzer | 1 |

