



# 5MP Fisheye Fixed Dome Network Camera

IID-DF5I10F14MAMTSVW

## Key Features

### Optics

Ultra wide angle lens, 360° panoramic image

Smart IR, Up to 10 m (33ft) IR distance

2D/3D DNR (Digital Noise Reduction)

### Compression

Ultra265, H.264, MJPEG

Built-in omni directional microphone (IPC815SR-DVPF14)

Triple stream (3 panoramic view)

### Network

ONVIF Conformance

### Structure

Support PoE power supply

Wide temperature range: -40°C to 60°C (-40°F to 140°F)

Wide voltage range of  $\pm 25\%$

IK10

IP66



[www.iid2secure.nl](http://www.iid2secure.nl)  
Extra Benefits, Less Price  
Finestrat, 19, 03530 La Nucia, Alicante, Spain  
© IID Secure Tech S.L.U. 2019

Heemdtedestraat 16 Amsterdam, Netherlands  
[Support@iid2secure.nl](mailto:Support@iid2secure.nl)  
+31614762425  
Data Subject to change without notice



## Specifications

IID-DF5I10F14MAMTSVW					
<b>Camera</b>					
Image sensor	1/2.8", progressive scan, 5.0 megapixel, CMOS				
Lens	1.4mm@F2.0				
DORI Distance	Lens	Detect (m)	Observe (m)	Recognize (m)	Identify (m)
	1.4mm	31.5	12.6	6.3	3.2
Angle of View	360°				
Shutter	Auto/Manual, shutter time: 1~1/100000 s				
Minimum Illumination	Colour: 0.01 Lux (F2.0, AGC ON) 0 Lux with IR				
Day/Night	IR-cut filter for day & night function				
S/N	>55dB				
IR Range	UP to 10m (33ft)				
wavelength	850nm				
IR On/Off Control	Auto/Manual				
Defog	Digital Defog				
WDR	120dB				
<b>Video</b>					
Compression	Ultra265, H.264, MJPEG				
H.264 code profile	Baseline profile, Main Profile, High Profile				
Frame Rate	Main Stream: (2592×1944): Max.30fps; Sub Stream: (1920×1080): Max.30fps; Third Stream: D1(720 x 576): Max.30 fps				
Video Bit Rate	128 Kbps~16 Mbps				
OSD	Up to 8 OSDs				
ROI	Up to 8 areas				
Privacy Mask	Up to 8 areas				
Motion Detection	Up to 4 areas				
General Function	Watermark, IP Address Filtering, Tampering Alarm, Alarm input, Alarm output, Access Policy, ARP Protection, RTSP Authentication, User Authentication				
<b>Image</b>					
White Balance	Auto/Outdoor/Fine Tune/Sodium Lamp/Locked/Auto2				
Digital noise reduction	2D/3D DNR				
Smart IR	Support				
Flip	Normal/Flip Vertical/ Flip Horizontal/180°				
Dewarping	N/A				
HLC	N/A				
BLC	Support				



[www.iid2secure.nl](http://www.iid2secure.nl)  
 Extra Benefits, Less Price  
 Finestrat,19, 03530 La Nucia, Alicante, Spain  
 © IID Secure Tech S.L.U. 2019

Heemdtedestraat 16 Amsterdam, Netherlands  
 Support@iid2secure.nl  
 +31614762425  
 Data Subject to change without notice



## Audio

Audio Compression	G.711	
Two-way audio	Supported	
Suppression	Supported	
Sampling Rate	8 KHZ	
<b>Storage</b>		
Edge Storage	Micro SD, up to 256GB	
Network Storage	ANR, NAS(NFS)	
<b>Network</b>		
Protocols	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, QoS	
Compatible Integration	ONVIF (Profile S, Profile G, Profile T), API	
Client	Estuations EZView EZLive	
Web Browser	Plug-in required live view: IE9+, Chrome 41 and below, Firefox 52 and below	
	Plug-in free live view: Chrome 57.0+, Firefox 58.0+, Edge 16+, Safari 11+	
<b>Live View Display</b>		
Mount Type	Support table, wall, and ceiling	
<b>Interface</b>		
Audio I/O	Input: impedance 35 k $\Omega$ ; amplitude 2 V [p-p]	
	Output: impedance 600 $\Omega$ ; amplitude 2 V [p-p]	
Alarm I/O	1/1	
Built-in Mic	Supported	
Video Output	1 BNC, impedance 75 $\Omega$ ; amplitude 1 V [p-p]	
Network	1 RJ45 10M/100M Base-TX Auto-adaptive Ethernet	
<b>Certifications</b>		
Certifications	CE: EN 60950-1 UL: UL60950-1 FCC: FCC Part 15	
<b>General</b>		
Power	DC12V $\pm$ 25%,PoE (IEEE 802.3af)	
	Power consumption: Max. 8.9 W	
Dimensions ( $\Phi \times H$ )	$\Phi$ 125 $\times$ 43.7 mm ( $\Phi$ 4.9" $\times$ 1.7")	
Net Weight	0.39kg (0.86lb)	




www.iid2secure.nl  
 Extra Benefits, Less Price  
 Finestrat,19, 03530 La Nucia, Alicante, Spain  
 © IID Secure Tech S.L.U. 2019

Heemtedestraat 16 Amsterdam, Netherlands  
 Support@iid2secure.nl  
 +31614762425  
 Data Subject to change without notice



Material	Shield plastic Body metal Bottom plate metal decorative cover plastic
Working Environment	-40°C~60°C (-40°F~140°F), Humidity: ≤95% RH
Storage Environment	-40°C~60°C (-40°F~140°F), Humidity: ≤95% RH
surge protection	6KV
Ingress Protection	IP66
Vandal Resistant	IK10
Reset Button	Supported

## Dimensions

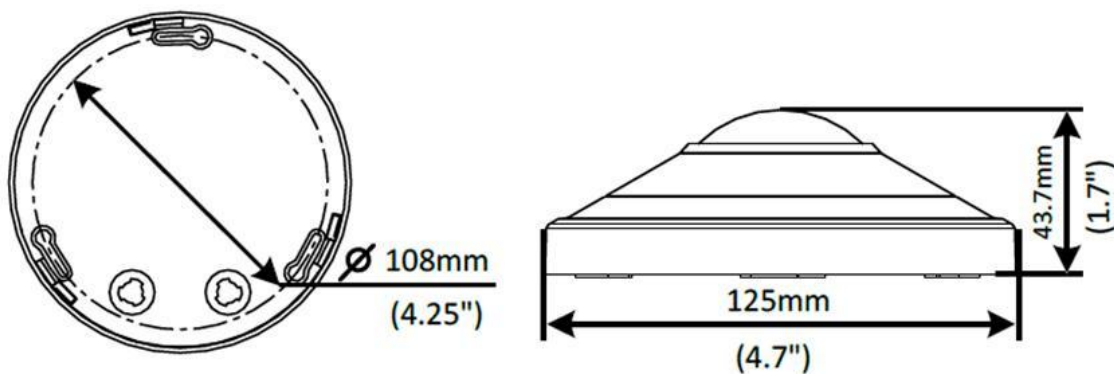

[www.iid2secure.nl](http://www.iid2secure.nl)  
Extra Benefits, Less Price  
Finestrat,19, 03530 La Nucia, Alicante, Spain  
© IID Secure Tech S.L.U. 2019

Heemtedestraat 16 Amsterdam, Netherlands  
Support@iid2secure.nl  
+31614762425  
Data Subject to change without notice

