



IID-TFR0250N-1

Multi – Biometric T&A and Access Control Terminal




Key Feature:

- Fingerprint, face, RFID and password 4 type verification mode
- High-speed identification less than 1 second
- TCP/IP Port for Internet connection
- Access Port available to control one lock and exit button
- Optional 5V 1900MAH UPS, standby up to 3 hours

Product		IID-TFR0250N-1
Main	Biometric RF	Fingerprint and Face 125kHz EM / 13.56MHz MIFARE
Capacity	Max User(1:N)	1:1000
	Max Fingerprint(1:N)	1:500
	Max Face (1:N)	1:200
	Bade (Card)	1000
	Max Record	50,000
Interface	TCP/IP	10M/100M USB
	USB	2.0 (Host) 1
	Relay	Relay
Hardware	LCD	2.8" Color LCD
	Sound	Stereo speaker
	Operating Temp.	0 °C- 45 °C
	Operating Humidity	20% ~ 80%
	Power	DC 5V 0.8A
	Dimensions(W x H x D mm)	167.9 x 151.5 x 30
Function	Standard	AutomaticStatusSwitch, Self-Service Query, DST,T9 Input 9 Digit User ID, Scheduled Bell, Photo ID Lock, sensor, Exit button

Configuration:

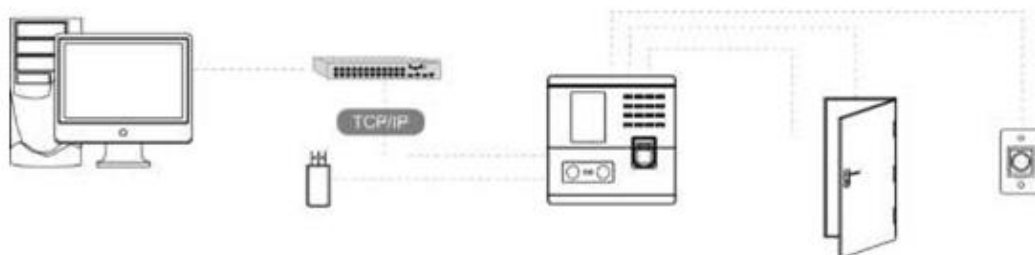

www.iid2secure.nl
 Extra Benefits, Less Price
 Finestrat,19, 03530 La Nucia, Alicante, Spain
 © IID Secure Tech S.L.U. 2019

Heemtedestraat 16 Amsterdam, Netherlands
 Support@iid2secure.nl
 +31614762425
 Data Subject to change without notice