



# Network Video Recorder

## IID-XVR16A24KD



### Key Features

- Support TVI, AHD, CVI, CVBS, IP cameras with adaptive
- access 16-channel BNC input
- Up to 8MP resolution for recording
- Support 1-ch HDMI output, 1-ch VGA output
- Long transmission distance over coax cable

### Specifications

Model	IID-XVR16A24KD
Video/Audio Input	
Analog Video Input	16-ch, BNC
IP Video Input	8-ch(only IP up to 24ch), each channel up to 4K
Supported Analog Camera Types	<p><b>Support AHD input:</b> 8MP@15fps(channel1-channel4), 5MP@20fps, 4MP@30fps, 3MP@30fps (channel1-channel4) 1080P@30fps, 720P@60fps</p> <p><b>Support TVI input:</b> 8MP@15fps(channel1-channel4), 5MP@20fps, 4MP@30fps, 3MP@20fps (channel1 -channel4) 1080P@30fps, 720P@60fps</p> <p><b>Support CVI input:</b> 8MP@15fps(channel1-channel4), 4MP@30fps, 1080P@30fps, 720P@60fps</p> <p><b>Support CVBS input</b></p>



www.iid2secure.nl  
 Extra Benefits, Less Price  
 Finestrat,19, 03530 La Nucua, Alicante, Spain  
 © IID Secure Tech S.L.U. 2019

Heemtedestraat 16 Amsterdam, Netherlands  
 Support@iid2secure.nl  
 +31614762425  
 Data Subject to change without notice




Audio Input	1-ch, RCA
Two-way Audio	1-ch, RCA
Channel Associated Audio	1-ch,RCA
<b>Network</b>	
Incoming Bandwidth	72Mbps
Outgoing Bandwidth	80Mbps
Remote Users	128
Protocols	TCP/IP, P2P, UPnP, NTP, DHCP, PP PoE
<b>Video/Audio Output</b>	
CVBS Output	1-ch, BNC
VGA Output	1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
HDMI Output	1920x1080p/60Hz,1920x1080p/50Hz,1600x1200/60Hz, 1280x1024/60Hz,1280x720/60Hz,1024x768/60Hz
Audio Output	1- ch, RCA
Synchronous Playback	16-ch
<b>Encoding</b>	
Recording Frame Rate	Main stream: 8MP Lite@8fps (channel1-channel4) 5MP Lite@12fps, 4MP Lite@15fps,3MP@15fps (channel1 - channel 4) 2MP@15fp, 720P@30fps Sub stream: D1@30fps(Max)
Recording Resolution	8MP Lite/5MP Lite/4MP Lite /3MP/1080P/960P/720P/960H/4C IF/CIF
<b>Hard Disk</b>	
SATA	2 SATA interface up to 6 TB For each HDD
<b>External Interface</b>	
Network Interface	1RJ45 10M/100M/1000M self-adaptive Ethernet Interface
USB Interface	Rear panel : 1 x USB3.0,Front panel : 1xUSB2.0
Serial Interface	1 x RS485
Alarm In	-
Alarm Out	-
<b>General</b>	
Power Supply	12V DC Power Consumption: ≤ 12 W( without HDD )
Working Environment	-10°C~+ 55°C (+14°F~+131°F), Humidity ≤ 90% RH (non-condensing)
Dimensions(WxDxH)	380mm x315mmx 53mm (15" x 12.4"x2.1")
Weight ( without HDD )	≤1.9 Kg ( 4.19lb )



[www.iid2secure.nl](http://www.iid2secure.nl)  
Extra Benefits, Less Price  
Finestrat,19, 03530 La Nucia, Alicante, Spain  
© IID Secure Tech S.L.U. 2019

Heemdedestraat 16 Amsterdam, Netherlands  
Support@iid2secure.nl  
+31614762425  
Data Subject to change without notice

## Dimension

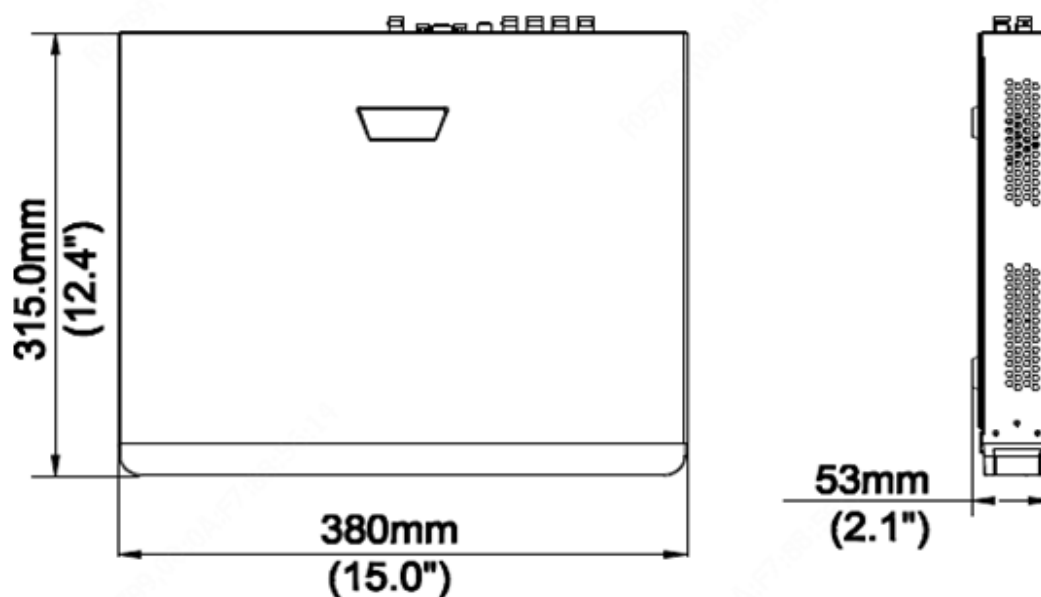

## Rear Panel

