



NVR64C0P4K8S



Key Features

- Third-party Network Cameras Supported
- Up to 12MP Resolution Recording and Playback
- HD and VGA Output, HD Port up to 4K(3840*2160)
- Support H.265+/H.265/H.264+/H.264 Video Format
- Support 8 SATA up to 48TB Capacity.
- Support Alarm 16CH Input and 4CH Output



www.iid2secure.nl
Extra Benefits, Less Price
Finestrat, 19, 03530 La Nucia, Alicante, Spain
© IID Secure Tech S.L.U. 2019

Heemtedestraat 16 Amsterdam, Netherlands
Support@iid2secure.nl
+31614762425
Data Subject to change without notice



Specification

| | |
|------------------------------|--|
| Model NO. | NVR64C0P4K8S |
| System | |
| Main Processor | ARM Cortex A17 Quad-core Processor |
| Operating System | Embedded LINUX |
| Video | |
| Input | 64CH(4000x3000, 3840x2160, 2592x1944, 2048x1536, 1920x1080, 1280x960, 1280x720, etc) |
| Output | 1 VGA, 2 HD |
| Audio | |
| Input | 1 Port RCA |
| Output | 1 Port RCA(Linear, 1kΩ) |
| Audio Bit Rate | 64kbps |
| Audio compression standard | AAC,G711u, G711a, ADPCM_DVI4 |
| Intercom | support (two-way) |
| Alarm | |
| Sensor Input | 16 |
| Output | 4 |
| Motion Detection | 64 Channel, MD Zones: 396 (22 x 18) |
| Trigger Events | Recording, Email, FTP, Snapshot, Buzzer and Screen Tips, alarm output |
| Display | |
| HD Output1 | 4K (3840 x 2160)/30Hz, 1920 x 1080/60Hz, 1280 x 1024/60Hz, 1280 x 720/60Hz |
| HD Output2 | 1920 x 1080/60Hz, 1280 x 1024/60Hz, 1280 x 720/60Hz |
| VGA | 1920 x 1080/60Hz, 1280 x 1024/60Hz, 1280 x 720/60Hz |
| Display Split | 64CHxD1/36CHxD1/25CHxD1/16CHxD1/9CHxD1/4CHxD1/1CHx1080P/1CHx3MP/1CHx4MP/1CHx5MP/1CHx4k/1CHx12MP |
| Digital Zoom | YES |
| OSD | Camera Title, Time, Recording, Motion Detection, Event Alarm |
| Recording | |
| Video Compression | H265/H264/H265+/H264+ |
| Resolution | 12MP(4000x3000),4k(3840x2160),5MP(2592x1944),4MP(2688x1520/2560x1440),3MP(2048x1536),1080P(1920x1080),960P(1280x960),720P(1280x720),D1(720x576/720x480) |
| Record Rate | PAL:12MP@29x25fp,4k@35x25fp,5MP@58x25fp,4MP@64x25fp,3MP@64x25fp,1080P@64x25fp,960P@64x25fp,720P@64x25fp, D1@64x25fp NTSC:12MP@29x30fp,4k@35x30fp,5MP@58x30fp,4MP@64x30fp,3MP@64x30fp,1080P@64x30fp,960P@64x30fp, 720P@64x30fp, D1@64x30fp |
| Record Mode | Manual\Timer\Motion Detection\Alarm Input\Smart Alarm |
| Playback & Backup | |
| Local Sync Playback | 3CH 12MP@15fps, 4CH 4K@30fps, 6CH 5MP@30fps, 8CH 4MP@30fps, 10CH 3M@30fps, 16CH 1080P@30fps, 16CH 960P@30fps, 16CH 720P@30fps |
| Decode Capability | 4CH 4K(3840x2160)@30fps |
| Remote Sync Playback | YES |
| Search Mode | ALL, Channel, Manual, Time, Date, Motion Detection, Event Alarm, Tag search |
| Playback Functions | Play, Pause, Stop, Rewind, Fast play, Slow Play, Full Screen, Frame Play ,Frame Rewind, Digital Zoom, tag, clip |
| Backup Mode | USB Device/Network |



www.iid2secure.nl
 Extra Benefits, Less Price
 Finestrat,19, 03530 La Nucia, Alicante, Spain
 © IID Secure Tech S.L.U. 2019

Heemdtedestraat 16 Amsterdam, Netherlands
 Support@iid2secure.nl
 +31614762425
 Data Subject to change without notice



| Network | |
|---------------------|--|
| Interface | 2 RJ-45 10/100/1000Mbps self-adaptive Ethernet interfaces |
| Incoming Bandwidth | 300MB |
| Network Functions | TCP/IP, HTTP, UPnP, DNS, NTP, SMTP, DHCP, FTP, DDNS, RTSP, RTCP, p2p,PPPOE |
| Onvif Version | Support Onvif 2.8 |
| Web Browser | IE8-11, Google Chrome (lower than Ver44), Firefox (lower than Ver53) |
| CMS Software | Support Windows 7/ Windows 8/Windows 10/MAC OS |
| Cloud Support | Yes |
| Smart Phone | iPhone, iPad, Android, Android Pad |
| POE | / |
| WIFI UI | / |
| Storage | |
| Interface Type | 8 SATA Hard Disk Interface (3.5" SATA) |
| Capacity | Up to 48TB capacity |
| eSATA | 1 eSATA interface |
| General | |
| Language UI | Traditional Chinese, Simplified Chinese, English, Polish, Czech, Russian, Thai, Hebrew, Arabic, Bulgarian, German, French, Portuguese, Turkic, Spanish, Italian, Hungarian, Romanian, Korean, Dutch, Greek, Vietnamese |
| USB Interface | 2 USB 2.0 Interfaces ,1 USB 3.0 Interface |
| RS485 | 2 Port |
| Power Supply | AC 115 to230V,3A |
| Working Environment | -10~55°C/10~90% |
| Dimension(WxDxH) | 2U, 440mm×450mm×95mm |
| Weight | 9.8Kg (without HDD) |




www.iid2secure.nl
Extra Benefits, Less Price
Finestrat,19, 03530 La Nucia, Alicante, Spain
© IID Secure Tech S.L.U. 2019

Heemdtedestraat 16 Amsterdam, Netherlands
Support@iid2secure.nl
+31614762425
Data Subject to change without notice



Dimensions

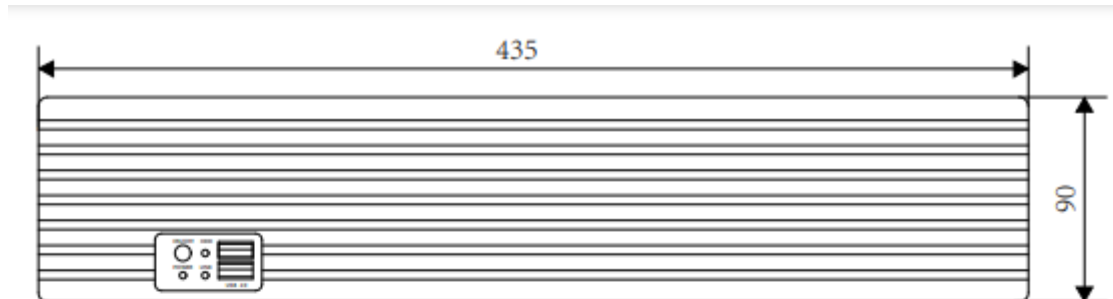

www.iid2secure.nl
Extra Benefits, Less Price
Finestrat,19, 03530 La Nucia, Alicante, Spain
© IID Secure Tech S.L.U. 2019

Heemdtedestraat 16 Amsterdam, Netherlands
Support@iid2secure.nl
+31614762425
Data Subject to change without notice